


EtherWire-4000

1. Photo

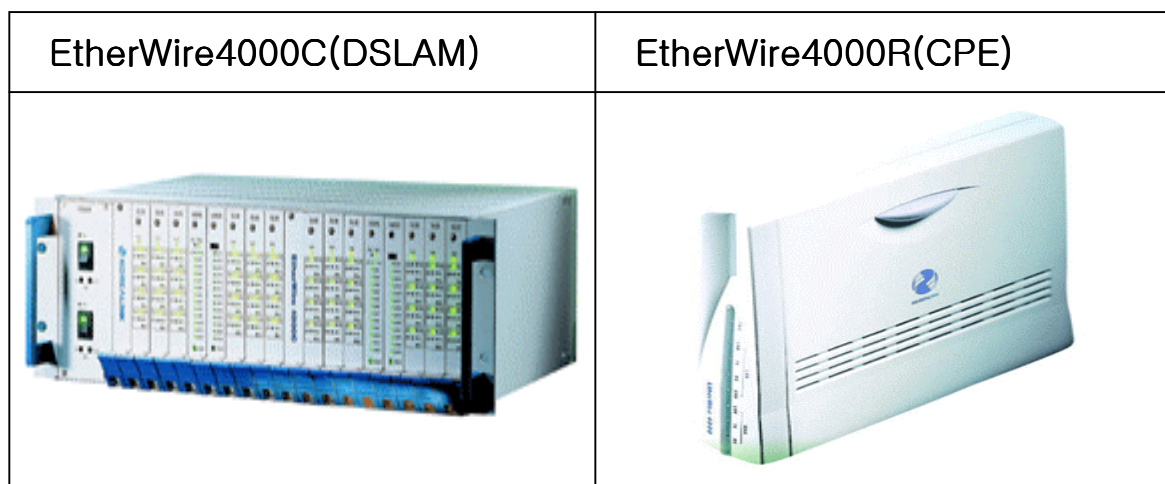

2. Spec.

	EtherWire4000C	EtherWire4000R(CPE)
Supply	Voice and Data	Voice and Data
Management	Telnet, VLAN	
S/W	SDSL Center Process, 32bit RTOS	SDSL Remote Process
LED	LAN, WAN, POWER	LAN:LINK,TX,RX,ERR
	LAN, WAN, Power	WAN:WNK,TX,RX
Speed	Select of S/W	16 Step of DIP Switch
Distance	0.5mm Cable 7Km(144Kbps), 2.3Mbps (3.2Km)	
Power	110/220VAC-1A, Power switch 2EA	AC Free Voltage-DC7V-800mA Adaptor, Power switch 1EA
LAN	Fast Ethernet, RJ-45 Connector	Ethernet Support, RJ-45 Connector
WAN	SDSL 4ports ~ 48ports, RJ-11 Connector	SDSL 1port, RJ-11 Connector
Size (mm)	432.7(W) x 315(D) x 132.5(H)	125(W) x 31.2(D) x 108(H)
Weight	9.59Kg	0.58Kg



4. Speed according to Distance

NO.	Speed	Cable			Remark
	Speed Table	0.4mm	0.5mm	0.65mm	
1	2,320 Kbps	2.6 Km	3.3 Km	3.5 Km	
2	2,064 Kbps	2.7 Km	3.9 Km		
3	1,808 Kbps	3.0 Km	4.3 Km	4.5 Km	
4	1,680 Kbps	3.1 Km	4.3 Km		
5	1,552 Kbps	3.2 Km	4.6 Km		
6	1,424 Kbps	3.3 Km	4.9 Km	5.5 Km	
7	1,296 Kbps	3.4 Km	4.9 Km		
8	1,168 Kbps	3.4 Km	5.0 Km		
9	1,040 Kbps	3.7 Km	5.0 Km	6.0 Km	
10	912 Kbps	3.8 Km	5.0 Km		
11	784 Kbps	3.9 Km	5.6 Km		
12	656 Kbps	4.1 Km	5.6 Km	7.0 Km	
13	528 Kbps	4.2 Km	5.6 Km		
14	400 Kbps	4.3 Km	6.2 Km	8.0 Km	
15	272 Kbps	4.8 Km	6.6km		
16	144 Kbps	5.4 Km	7.0km	9.0 Km	

4. Photo

EW-4000C(DSLAM, Max 48Ports)

Front Side

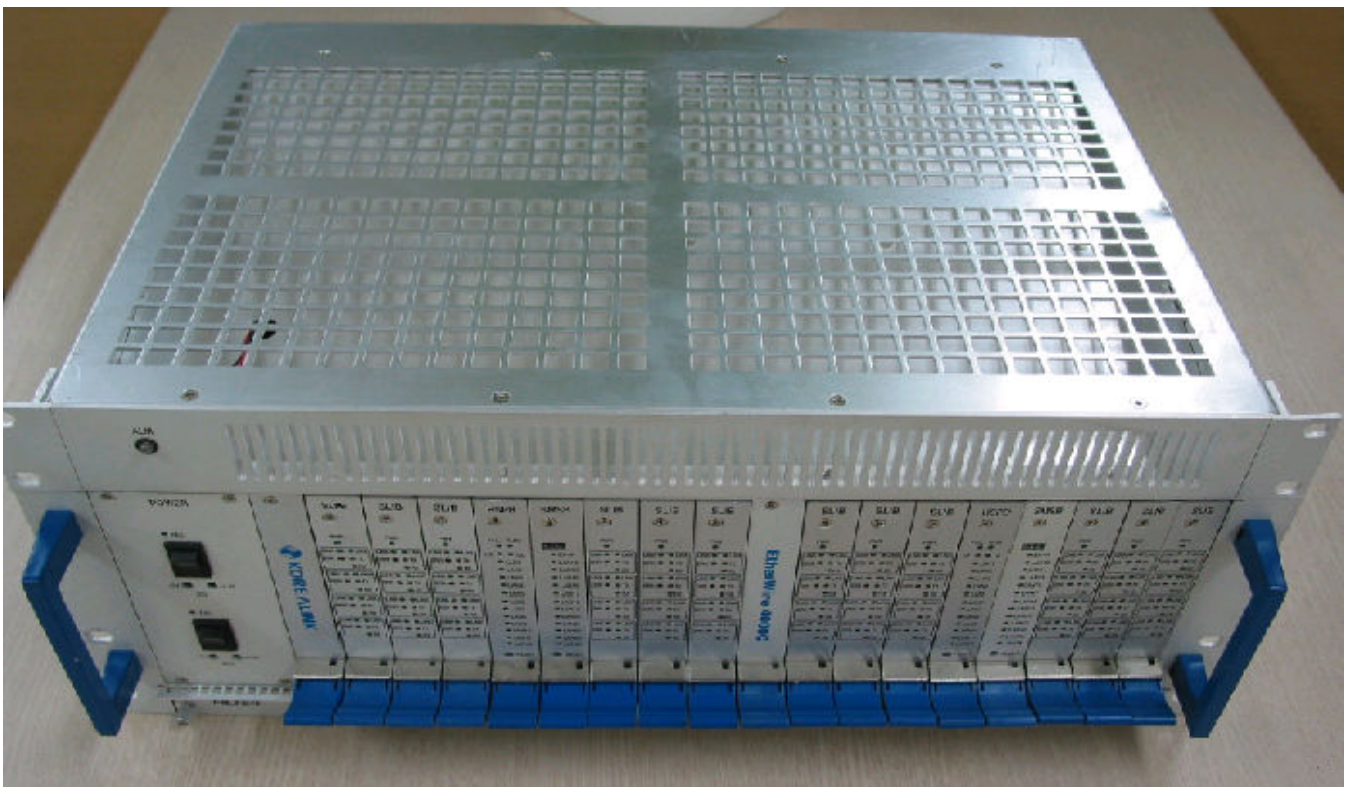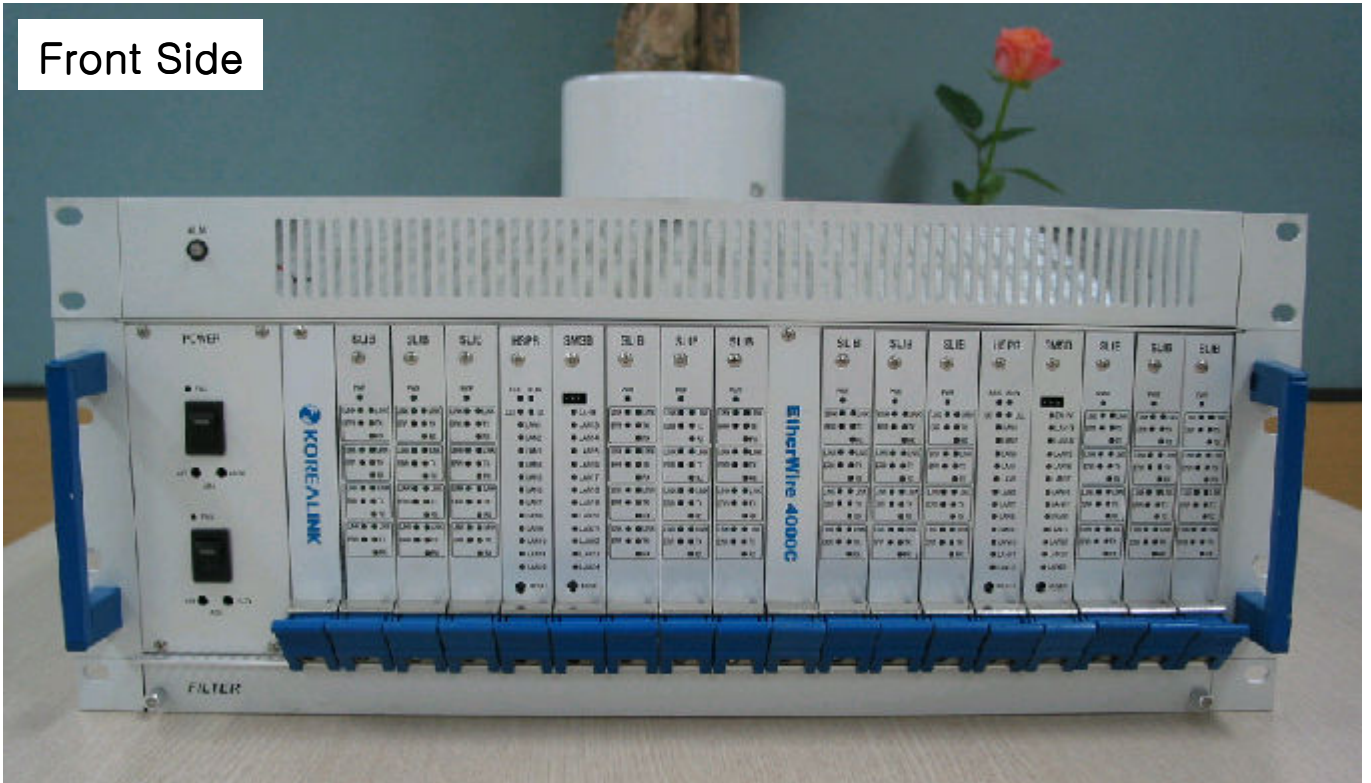

EW-4000R(CPE)

Inner Box

